



UNIQUE SYSTEM IN ARGENTINA

# BIMAX

NOTO DEVELOPED THE FIRST EQUIPMENT WITH REAL BIPOLAR RESISTIVE RADIOFREQUENCY



**TRANSMITTER CONTROL.**

Exclusive safety system indicating professionals the way emitters activates.

**2 YEARS WARRANTY**

**+ TRAINING**

**+ MAINTENANCE**

**UNIQUE SYSTEM OF REAL RESISTIVE RF**

For facial application the BIMAX (Real Bipolar) has two R.F. emitters and one receptor, doubling them for body application.

All Noto's RF equipments generates the balanced temperature emission to heat the extracellular matrix, where collagen fibers are embedded.

BIMAX achieves results and improves blemishes from the first session with durable effects on skin's tightening and firmness and on body and facial outline definition, among others.

Also, its application enhances imperfections appearance as fat tissue applies more electricity resistance than ordinary ones.

WELCOME TO NOTO! WELCOME TO TECHNOLOGY!






With the launch of Radiofrequency line, NOTO proposes a different course for aesthetics. A new scenario where therapies combination, cutting-edge technology, and quality products and supplies are fundamental for visible, effective, and durable results.

#### How this novel system works?

Thanks to emitters and receptors (made of surgical stainless steel) quantity and positioning, BIMAX increases its focused energy on the application zone, obtaining a better power concentration. Temperature level reaches 55/58°C (131/136.4°F) on employment zone and dermis layer, thanks to its cross fields system - developed by Noto. This energy concentration allows an immediate contraction of collagen and elastine fibers, stimulating their unnatural process. Temperature reached on superficial level is between 36°C (96.8F) and 42°C (107.6F).

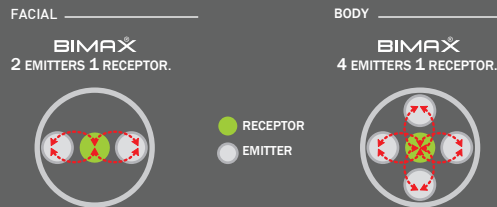

#### "ID" SYSTEM (IMPEDANCE DETECTOR)



ID® smart system reveals the professional, with a luminous sensor, the accurate patient-electrode link and the correct emission of the selected current - developed by Noto®. This new technology assures treatment safety to professionals.

#### LASTEST TECHNOLOGY and SAFETY

Its intuitive and easy of use touch screen shows parameters of time control, power, emission mode, and usage time, among others alternatives.




#### BIMAX IPX 0 Device

MANUFACTURED BY:	NOTO GROUP S.A.
COUNTRY:	ARGENTINA
NAME OF PRODUCT	BIMAX
WIDE:	350 MM
LENGHT:	310 MM
HEIGHT:	160 MM
WEIGHT:	4.6 KG.
POWER SUPPLY VOLTAGE:	98 to 240 VAC 50/60HZ
ENERGY CONSUMPTION:	120 V
POWER:	60 WATT (body) 30 WATT (facial)
PROGRAMMING:	98 to 240 VAC 50/60HZ
FREQUENCY:	1 MHZ +/- 10%
DISPLAY:	128X64 GRAPHIC TOUCH
SOURCE:	INTERNAL SWITCH
TECHNOLOGY:	SMT
TIMER:	MANUAL SETTING
ENTRANCE FUSE TYPE:	F 1.5 AL 250 V
EMITTER ENTRANCE FUSE:	F 1 AL 250 V

BIMAX	
QUANTITY OF EMITTERS:	2
QUANTITY OF RECEPTORS:	1

NOTE: DEVICE SPECIFICATIONS MAY CHANGE WITHOUT PREVIOUS NOTICE.

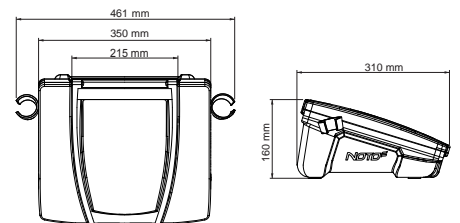

**BIMAX**

NOTO supports all customers with a set of tools availbale at all times.

Tools as training, post-sale service support, and assured spare parts. All these instruments with the aim of making Noto's products your best choice.

More equipments by **NOTO:**

**TRIMAX** - TRIPOLAR RESISTIVE RADIOFREQUENCY.

**N 1800** - HIGH PULSED ELECTROPORATION + MICRODERMABRASION