

UNIQUE IN ITS KIND

TRIMAX

NOTO DEVELOPED THE FIRST EQUIPEMENT WITH REAL TRIPOLAR RESISTIVE RADIOFREQUENCY



UNIQUE DEVICE WITH TEMPERATURE SENSOR AND CONTROL



TOUCH SCREEN

2 YEARS WARRANTY

+ TRAINING

+ LKYLING

TRANSMITTER CONTROL.

Exclusive safety system indicating professionals the way emitters activate.



UNIQUE RESISTIVE RADIOFREQUENCY SYSTEM

For facial application the TRIMAX has three radiofrequency emitters and one receptor, doubling them for body application.

Cross fields emission system increases its focused energy on the application zone. Its software enables professionals to set for each treatment the adequate temperature.

TEMPERATURE SENSOR AND CONTROL IN REAL TIME

Work safer thanks to its temperature sensor in real time and settings. Achieve results and improve blemishes from the first session with durable effects on skin's tightening and firmness and on body and facial outline definition.

All Noto's RF equipments generates the balanced temperature emission to heat the extracellular matrix, where collagen fibers are embedded.


NOTO

TRUSTED TECHNOLOGY

NOTO proposes a different course for aesthetics, a new scenario where therapies combination, cutting-edge technology, and quality products and supplies are fundamental for visible, effective, and durable results.

HOW THIS NOVEL SYSTEM WORKS?

Thanks to emitters' quantity, positioning, and its cross fields system made of surgical stainless steel, TRIMAX increases its focused energy on the application zone, obtaining higher power concentration. Temperature reaches up to 42°C (107.6°F) on epidermis layer and between 55/58°C (131/136.4°F) in dermis layer. This concentration of energy allows an immediate contraction of collagen and elastine fibers, stimulating its unnatural process and achieving instant, visible, and concrete results.

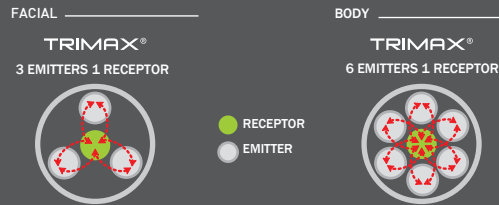

SAFETY & TECHNOLOGY - TEMPERATURE CONTROL IN REAL TIME

TRIMAX is the only equipment incorporating a real-time digital contact temperature sensor, constantly providing the superficial skin's temperature and avoiding risks while High Powered resistive radiofrequency is applied. Visualize and control parameters of temperature control, time, power, emission mode, and usage time, among others, with its touch screen display or console.

The device has an assisting control feature and a security system, an audible signal, which warns the professional when temperature exceeds 39°C (102.2°F) on the application zone. TRIMAX double security system has an emission stoppage when superficial temperatures reaches 45°C (113°F), preventing any damage or burn injuries.

"ID" SYSTEM (IMPEDANCE DETECTOR)


ID® smart system reveals the professional, with a luminous sensor, the accurate patient-electrode link and the correct emission of the selected current - developed by Noto®. This new technology assures treatment safety to professionals.

TRIMAX IPX 01 Device

MANUFACTURED BY:	NOTO GROUP S.A.
COUNTRY:	ARGENTINA
NAME OF THE PRODUCT:	TRIMAX
WIDE:	350 MM
LENGTH:	310 MM
HEIGHT:	160 MM
WEIGHT:	4.6 KG.
POWER SUPPLY VOLTAGE:	98 to 240 VAC 50/60HZ
ENERGY CONSUMPTION:	120 VA
POWER:	90 WATT (BODY) Y 60 WATT (FACIAL)
PROGRAMMING :	MICROCONTROLLER
FREQUENCY:	1 MHZ +/- 10%
DISPLAY :	128X64 GRAPHIC TOUCH
SOURCE:	INTERNAL SWITCH
TECHNOLOGY:	SMT
TIMER:	MANUAL SETTING
ENTRANCE FUSE TYPE:	F 1.5 AL 250 V
EMITTER ENTRANCE FUSE:	F 1 AL 250 V

TRIMAX	
TEMPERATURE SENSOR:	2 AND A HALF DIGITS
QUANTITY OF EMITTERS:	3

NOTE: DEVICE SPECIFICATIONS MAY CHANGE WITHOUT PREVIOUS NOTICE.

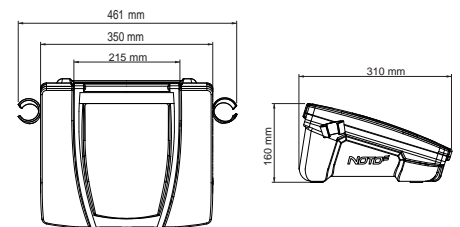

TRIMAX

NOTO supports all clients with a set of tools available at all times.

Tools as training, post-sale service support, and assured spare parts. All these instruments with the aim of making Noto's products your best choice.

More equipments by NOTO:

N 1400 - Microdermabrasion
CAV 47 - Variable Frequency Cavitation